

SOLESBEE'S.COM
+1(800) 419-8090



EXCAVATOR TC MULCHER

POWERED BY  CANGINI

SOLESBEE'S EXCAVATOR TC MULCHER POWERED BY CANGINI

The excavator mulcher is designed for heavy-duty green maintenance operations. It can be attached to excavators ranging from 1.5 to 9.0 tons and is designed for front attachment. The mulchers are highlighted by a reinforced casing with a double bottom for exceptional impact and torsion resistance, and shielded bearings to protect rollers from collisions.

- ☒ Quality Material
- ☒ Availability
- ☒ 2 Year Warranty

COUPLING ADJUSTMENT SLIDE

Allows the attachment position to be adjusted as required.

INTEGRATED VALVE UNIT

Includes a flowrate reducer to maintain constant rotor speed, ruling out possible overspeeding due to a change in the machine's oil flow rate.



SHAFT CONFIGURATION OF HAMMERS/BLADES

Hammers: Designed to withstand to heavy jobs, such as cutting shrubs up to a diameter of 10cm

SUPPORT ROLLER

The support roller is bolted to the body and adjustable, allowing the cutting height to be changed based on the vegetation.





OPTIONAL FEATURES


4 PIPES

HYDRAULIC SLEWING RING

Provides 360° continuous left and right rotation. It allows the flail head to be swiveled for cutting requirements and enables work in both directions.


FLOATING SYSTEM

Optional floating allows the flail head to better adapt to the ground during its operation for a better result.

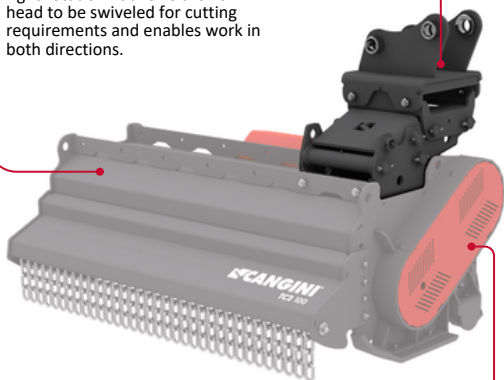

PISTON ENGINE

Suitable for heavy and continuous work. Releases higher torques than the gear motor and is capable of supporting higher pressures (if supplied by the machine).



CANGINI EXCAVATOR TC MULCHER

POWERED BY CANGINI

FEATURES

- Complete with hydraulic hoses L= 2000 mm and 3/4" (male/female) flat-face couplings
- Automatic self-leveling right and left tilt +/- 10° to better follow the course of the ground
- Composed of double bottoms that provide high impact resistance

APPLICATIONS

- Ideal for green maintenance and urban green management: cleaning undergrowth and roadside areas, felling and shredding trees and branches.



Solesbee's Equipment
2640 Jason Industrial Pkwy,
Winston, GA 30187

+1 (800) 419-8090
sales@solesbees.com

@solesbeesequipment













EXCAVATOR TC MULCHER

POWERED BY **SCANGINI**


SPECIFICATIONS



TONS (LB)		1.5 - 4.5 (3307 - 9921)	4.0 - 9.0 (8818 - 19,842)	
		MOD. TC1-100	TC2-100	TC2-120
A	IN	39	39	47
B	IN	47	46	54
C	IN	25	32	32
D	IN	18	21	21
 W/O COUPLER	LB	276	595	661
		DIRECT	2	2
	IN	3.1	4.5	4.5
 MIN.	(GAL/MIN)	5	7	7
 MAX.	(GAL/MIN)	24	24	24
 MAX.	PSI	3626	3626	3626
 MAX. WITH HAMMERS	IN	1.6	3.1	3.1



TC1-100

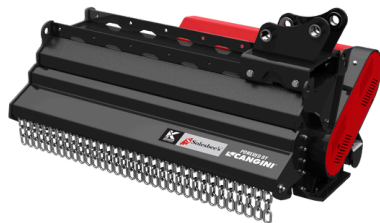

TC2-100

**Note: Specifications, dimensions, and weight are approximate and subject to change without notice