

SOLESBEES.COM
+1(800) 419-8090



SOLESBEE'S IS THE PROUD DISTRIBUTOR OF AUGER TORQUE IN THE U.S.



AUGER TORQUE CONE CRUSHER BUCKET

AUGER TORQUE CONE CRUSHER BUCKET

The Cone Crusher Bucket provides a simple, efficient, and cost-effective way to repurpose and recycle small volume construction rubble and debris into usable aggregate.

Whether it's general clay construction brick, light concrete walling blocks, hollow concrete 'breeze blocks', concrete pavers, asphalt and more, the Auger Torque Cone Crusher is highly effective at crushing to an output-produced material size of around 1.5-3 inches.

- ✓ Quality
- ✓ Availability
- ✓ 2 Year Warranty

EPICYCLIC GEARBOX

Torque is amplified by using the unique Auger Torque planetary gearbox. This system allows the motors output torque to be multiplied with extreme efficiency as well as ensuring the durability and reliability you need.

BUCKET SCOOP

A bucket scoop allows rubble to be easily lifted and processed, making a two-person job easily completed by one.

SEVEN-SIDED CONE

Large rocks are initially fractured in the upper region of the crusher where the gap is wider between the drum and cone. With a constant crushing motion, the material gets smaller as it falls further down, being repeatedly broken along the way.

HIGH QUALITY HYDRAULIC MOTORS

Auger Torque's huge buying power means we work closely with high-quality suppliers to develop the most reliable attachments available on the market today.

GRINDING FACE

Rubble effectively crushes through hardened steel and tungsten carbide grinding faces. Protruding tungsten bars allow rubble to move down the barrel and through the bottom of the bucket.






CONE CRUSHER BUCKET

FEATURES

- Easy to use and compact for small working sites—compatible with excavators, backhoes, and skid steers
- Bucket mouth allows for effective scooping and sorting
- Seven-sided rotating cone inside a cylindrical drum
- Grinding faces made of steel and tungsten carbide
- Built around a series 3.5 sub gearbox

SPECIFICATIONS

MODEL	SERIES 1
Carrier Weight: Excavator Backhoe Skidsteer	3-10t
Torque Range	6320-10112 Nm (4661-7458 ft-lb)
Oil Pressure Range	150-240 Bar (2175-3480 psi)
Oil Flow Range	70-150 LPM (18-39 GPM)
Speed Range	36-100 rpm
Unit Length	1300mm (51 inch)
Unit Width	885mm (35 inch)
Unit Height	637mm (25 inch)
Drum Diameter	600mm (23 inch)
Unit Weight	380 kg (838 lb)
THROUGHPUT Mixed material throughput = up to 5 tons per hour. Brick throughput = up to 9 tons per hour. Output material = up to 60mm.	

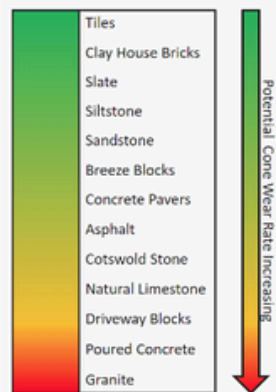


*Note: Specifications, dimensions, and weight are approximate and subject to change without notice

Without the Auger Torque Cone Crusher



WITH the Auger Torque Cone Crusher

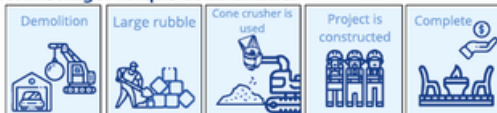

Resulting in more efficient use of time, less money spent and higher profit margins



Solesbee's Equipment

2640 Jason Industrial Pkwy,
Winston, GA 30187

+1 (800) 419-8090
sales@solesbees.com

@solesbeesequipment

