

SOLESBEES.COM
+1(800) 419-8090



SOLESBEE'S IS THE PROUD DISTRIBUTOR OF AUGER TORQUE IN THE U.S.



AUGER TORQUE TRENCHER

AUGER TORQUE MT TRENCHER

Auger Torque's range of trenchers is available for a wide range of skid steers, mini loaders, backhoes, and excavators up to 10 tons in weight and cover depths of up to 5 feet and widths up to 14 inches, while spoil is piled neatly to the side of the trench by the integral auger.

- ✓ **Quality**
- ✓ **Availability**
- ✓ **2 Year Warranty**

EPICYCLIC GEARBOX

Torque is amplified by using the unique Auger Torque planetary gearbox. This system allows the motors output torque to be multiplied with extreme efficiency as well as ensuring the durability and reliability you need

QUALITY MOTOR AND GEARBOX

Using only the highest quality hydraulic motors with flow rates of up to 40 GPM and then amplified by Auger Torque's own 'bullet-proof' planetary gearbox means that our trenchers have the reliability and power to ensure your trenching is carried out with ease.

RAPID CHAIN ADJUSTMENT

A convenient feature making chain adjustment quick and easy.

MULTIPLE TEETH COMBINATION


Chains are available in a number of different teeth configurations for trenching in soft ground, mixed grounds and even permafrost, allowing you to get the job done quickly.

ADJUSTABLE DEPTH SKID

The precision depth control skid enables the operator to set the machine at up to three different trench depths.

TRENCH CLEANER

Built-in trench cleaner to restrict loose spoil traveling along the new trench base

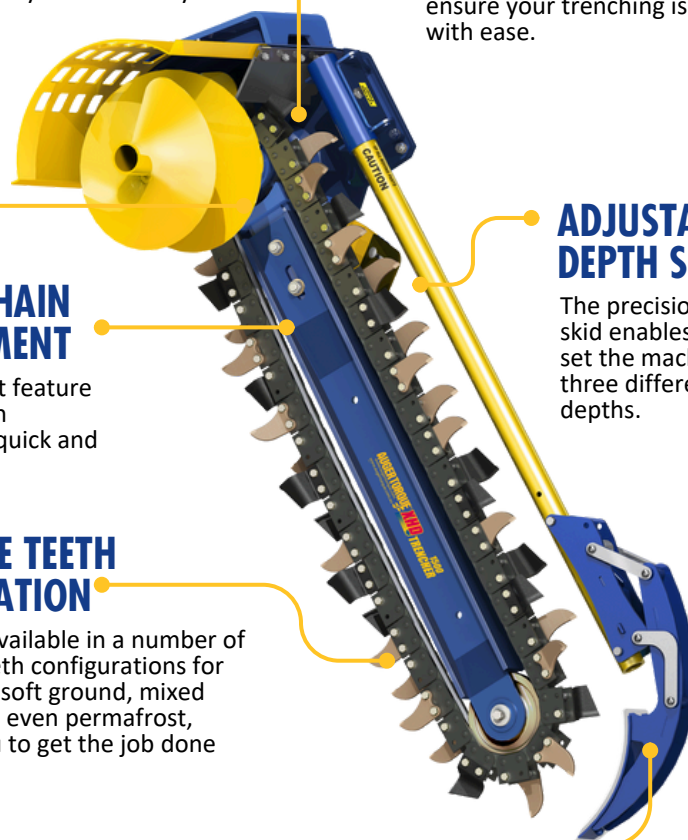

SPECIFICATIONS

Model	MT24	MT36	XHD36	XHD48	XHD60
Carrier Weight (tons)	2.5-4.5	3-5	5-10	5-10	5-10
Unit Width (in)	34	34	40	40	40
Unit Height (in)	29	29	32	32	32
Unit Length (in)	58	71	77	89	101
Oil Pressure Range (psi)	2320-3000	2610-3481	2610-3481	2610-3481	2610-3481
Oil Flow Range (gpm)	9-17	12-21	16-25	18-30	22-35
Cutting Width Range (in)	4-12	4-12	6-14	6-12	6-8


CHAIN OPTIONS



EARTH
Soft Ground



COMBI
Mixed Terrain



TUNGSTEN
Hard Ground/Frozen

MOUNTING HITCH OPTIONS

Three versions of the mounting hitch are available:

SOFT SHIFT FRAME
For skid steer loaders

MINI LOADER FRAME
For mini loaders

EXCAVATOR HITCH
Available in several pin sizes to fit most machines



AUGER TORQUE TRENCHERS

FEATURES

- Adjustable depth settings from 1-5 feet
- Chain width options from 3.94-13.78"
- Multiple teeth combinations to suit ground type
- Quick chain adjustment
- Various hitch formats to suit parent machine
- High quality motor and gearbox
- Hoses included

APPLICATIONS

- Ground source heat pumps
- Drainage and irrigation
- Gas and water pipework
- Electrical and fiber optic cables
- Large bore gas and water pipework
- Hedge and tree planting



Solesbee's Equipment

2640 Jason Industrial Pkwy,
Winston, GA 30187

+1 (800) 419-8090
sales@solesbees.com

@solesbeesequipment

